

CONGELATORI A POZZO

CHEST FREEZER



FR 300 FLP

Congelatore statico a pozzo porta cieca
sistema flip-flop.
Static chest freezer with flip-flop lids.



FR 500 FLP

Congelatore statico a pozzo porta cieca
sistema flip-flop.
Static chest freezer with flip-flop lids.



FR 400 FLP


Congelatore statico a pozzo porta cieca
sistema flip-flop.
Static chest freezer with flip-flop lids.



Klimaitalia




Interno in alluminio martellato
Embossed aluminium inner liner

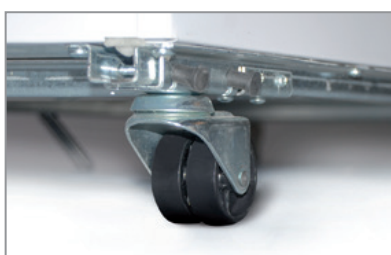

Ruote
Castors



Sistema flip-flop
Flip-flop lids

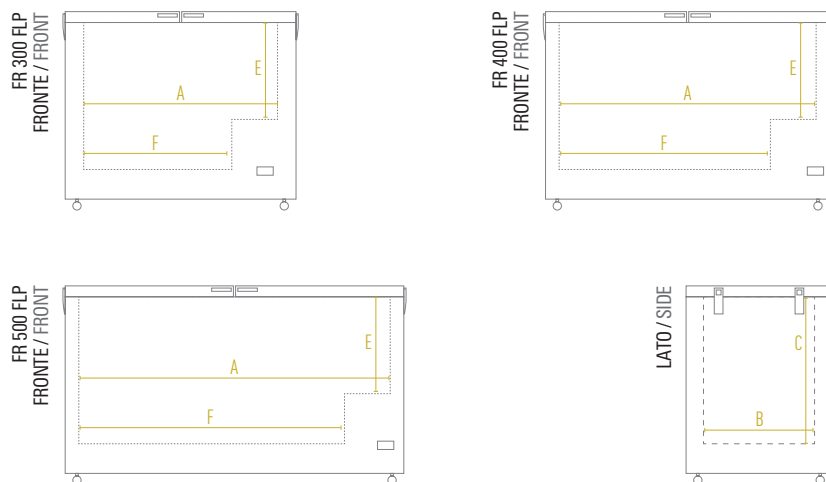

Dimensioni mm / Dimensions mm	FR 300 FLP	FR 400 FLP	FR 500 FLP
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1060 x 630 x 875	1305 x 630 x 875	1555 x 630 x 875
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1080 x 760 x 970	1360 x 760 x 970	1610 x 760 x 970
A - Larghezza / Width	890	1180	1430
B - Profondità / Depth	510	510	510
C - Altezza / Height	675	675	675
E - Altezza Minima / Min. Height	445	445	445
F - Larghezza Minima / Min. Width	680	970	1220
Adesivo Laterale Destro / Side Right Sticker	618 x 477	618 x 477	618 x 477
Adesivo Laterale Sinistro / Side Left Sticker	618 x 745	618 x 745	618 x 745
Adesivo Frontale / Front Sticker	908 x 745	1288 x 745	1538 x 745

Caratteristiche Tecniche / Technical Features	FR 300 FLP	FR 400 FLP	FR 500 FLP
Temperatura / Temperature Range	-23 °C / -13 °C	-23 °C / -13 °C	-23 °C / -13 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 275 / 288	Lt. 373 / 391	Lt. 458 / 479
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium	Alluminio martellato Embossed Aluminium
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Rumorosità / Noise level	dB 52	dB 53	dB 53
Spessore isolamento / Insulation thickness	mm 60	mm 60	mm 60
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual
Ruote-Piedi / Castors-Feet	4 Ruote / 4 Castors	4 Ruote / 4 Castors	4 Ruote / 4 Castors
Peso Netto-Lordo / Net-Gross Weight	Kg 54 / 58	Kg 63 / 68	Kg 70 / 76
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A	R290
Assorbimento / Absorption	W 225	W 256	W 257
Consumo Energia / Energy Consumption	KwH/24H 2,05	KwH/24H 2,43	KwH/24H 4,89