

# FRIGO VETRINE VERTICALI

## VISICOOLER



### KLIMA 160 BLK

Frigo vetrina bibite ventilata  
Ventilated visicooler



### KLIMA 160 WHT

Frigo vetrina bibite ventilata  
Ventilated visicooler

| Capienza / Capacity              | KLIMA 160 BLK / WHT |
|----------------------------------|---------------------|
| Bottiglia lt. 1 / Bottle lt. 1   | 69                  |
| Bottiglia cl. 75 / Bottle cl. 75 | 78                  |
| Bottiglia cl. 66 / Bottle cl. 66 | 127                 |
| Bottiglia cl. 50 / Bottle cl. 50 | 175                 |
| Lattina cl. 33 / Can cl. 33      | 408                 |

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging




Termostato digitale  
Digital thermostat



Interno in ABS termoformato  
Thermoformed ABS inner liner



Mensole in metallo  
Metal shelves

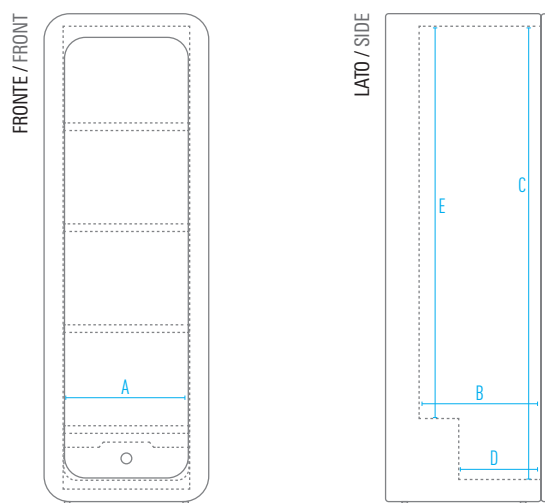

| Dimensioni mm / Dimensions mm                             | KLIMA 160 BLK / WHT |
|-----------------------------------------------------------|---------------------|
| Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)  | 540 x 572 x 1600    |
| Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH) | 580 x 619 x 1760    |
| A - Larghezza / Width                                     | 476                 |
| B - Profondità / Depth                                    | 400                 |
| C - Altezza / Height                                      | 1518                |
| Adesivo Vetro / Glass Sticker                             | 410 x 1450          |

| Caratteristiche Tecniche / Technical Features                                        | KLIMA 160 BLK / WHT                                                                                   |
|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Temperatura / Temperature Range                                                      | 0 °C / +20 °C                                                                                         |
| Classe Climatica / Climate Class                                                     | 0, 1, 3, 4, 6                                                                                         |
| Volume Netto-Lordo / Net-Gross Volume                                                | Lt. 263 / 268                                                                                         |
| Superficie Esterna<br>Body                                                           | Lamiera preverniciata con trattamento anticorrosione<br>Prepainted sheet with anticorrosion treatment |
| Superficie Interna / Inner Liner                                                     | ABS                                                                                                   |
| Termostato / Thermostat                                                              | Elettronico / Electronic                                                                              |
| Rumorosità / Noise level                                                             | dB 38                                                                                                 |
| Spessore isolamento / Insulation thickness                                           | mm 45                                                                                                 |
| Sbrinamento / Defrost                                                                | Automatico a fermo compressore<br>Automatic compressor cycle                                          |
| Illuminazione / Lighting                                                             | 2 Led (destra e sinistra)<br>2 led (left and right)                                                   |
| Reversibilità porta / Reversible door                                                | Si / Yes                                                                                              |
| Mensole in metallo ad estrazione (LxP)<br>Metallic shelves with sliding system (WxD) | N° 4 - mm 413 x 428<br>N° 1 cassetto/basket - mm 405 x 270 x 150                                      |
| Piedi-Ruote / Castors-Feet                                                           | 4 piedi / 4 feet                                                                                      |
| Peso Netto-Lordo / Net-Gross Weight                                                  | Kg 74 / 80                                                                                            |
| Voltaggio / Voltage                                                                  | V 220-240                                                                                             |
| Frequenza / Frequency                                                                | Hz 50                                                                                                 |
| Refrigerante / Refrigerant                                                           | R600A                                                                                                 |
| Assorbimento / Absorption                                                            | W 160                                                                                                 |
| Consumo Energia / Energy Consumption                                                 | Kwh/24H 1,0                                                                                           |