

ESPOSITORI PER SUSHI

SUSHI SHOWCASE



SH 150

Espositore soprabanco per sushi.
Sushi showcase.



SH 180


Espositore soprabanco per sushi.
Sushi showcase.






Vaschette
Separators



Superficie esterna in lamiera anticorrosione
Sheet with anticorrosion treatment body

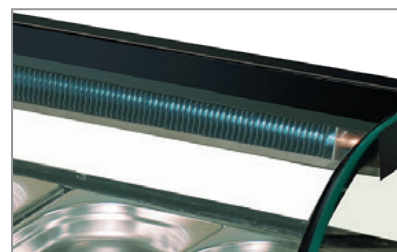

Evaporatore superiore
Upper evaporator

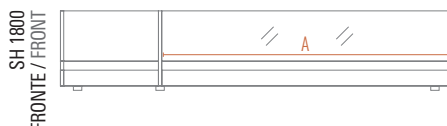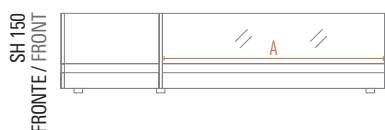

Dimensioni mm / Dimensions mm	SH 150	SH 180
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1500 x 415 x 300	1800 x 415 x 300
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1581 x 557 x 496	1881 x 557 x 496
A - Larghezza / Width	1030	1330
B - Profondità / Depth	400	400
C - Altezza / Height	270	270

Caratteristiche Tecniche / Technical Features	SH 150	SH 180
Temperatura / Temperature Range	0 °C / +6 °C	0 °C / +6 °C
Classe Climatica / Climate Class	4	4
Volume Netto / Net Volume	Lt. 59,7	Lt. 76,6
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Vetro / Glass	Vetro / Glass
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 40	dB 40
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual
Illuminazione / Lighting	1 Led orizzontale / Horizontal	1 Led orizzontale / Horizontal
Vaschette Gastronorm GN - Includere GN pans - Included	N° 5 GN1/3	N° 7 GN1/3
Ruote-Piedi / Castors-Feet	6 Piedi / 6 Feet	6 Piedi / 6 Feet
Peso Netto-Lordo / Net-Gross Weight	Kg 51 / 71	Kg 61 / 81
Voltaggio / Voltage	V 220	V 220
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A
Assorbimento / Absorption	W 160	W 230
Consumo Energia / Energy Consumption	KwH/24H 1,3	KwH/24H 1,2