

ARMADI MURALI REFRIGERATI

MULTIDECK COOLERS/FREEZER



MILANO 630 BLK

Armadio murale statico con agitatore.
Temperatura normale.
Static-fan assisted multideck cooler.
Positive temperature.



MILANO 1270 BLK

Armadio murale doppia porta ventilato.
Temperatura normale.
Ventilated double door multideck cooler.
Positive temperature.



MILANO 630 BT BLK

Armadio murale no frost.
Bassa temperatura
No frost multideck freezer.
Negative temperature.



Porta a sfioro senza cornice
Full glass frameless door




Termostato elettronico
Electronic thermostat




Illuminazione led
Led lighting




MILANO 630
FRONTE / FRONT



MILANO 1270
FRONTE / FRONT

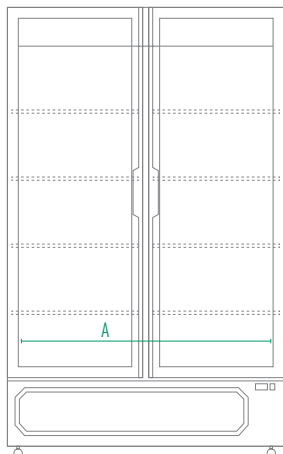

LATO / SIDE

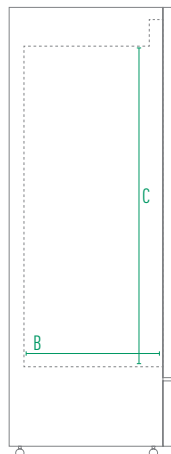

Dimensioni mm / Dimensions mm	MILANO 630 BLK	MILANO 630 BT BLK	MILANO 1270 BLK
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	625 x 785 x 2040	665 x 800 x 2040	1270 x 740 x 2040
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	670 x 870 x 2230	760 x 870 x 2230	1280 x 800 x 2230
A - Larghezza / Width	544	544	1184
B - Profondità / Depth	638	636	638
C - Altezza / Height	1594	1594	1594
Adesivo Laterale / Side Right	674 x 2006	691 x 2006	674 x 2006
Adesivo vetro / Sticker glass	517 x 1595	557 x 1602	517 x 1595

Caratteristiche Tecniche / Technical Features	MILANO 630 BLK	MILANO 630 BT BLK	MILANO 1270 BLK
Temperatura / Temperature Range	+1 °C / +10 °C	-23 °C / -18 °C	+1 °C / +10 °C
Classe Climatica / Climate Class	4	3	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 527 / 551	Lt. 500 / 550	Lt. 1095 / 1215
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 56	dB 56	dB 56
Smart Link WiFi Controllo remoto / Remote control	Optional	Optional	Optional
Spessore isolamento / Insulation thickness	mm 45	mm 61	mm 45
Sbrinamento Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a gas caldo + Manuale Automatic with hot gas system + Manual	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	2 Led verticali / vertical	2 Led verticali / vertical	3 Led verticali / vertical
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 4 - mm 529 x 543	N° 4 - mm 529 x 541	N° 8 - mm 580 x 543
Ruote-Piedi / Castors-Feet	4 Ruote / 4 Castors 2 Piedi / 2 ffeet	4 Ruote / 4 Castors 2 Piedi / 2 ffeet	4 Ruote / 4 Castors 2 Piedi / 2 Feet
Peso Netto-Lordo / Net Weight	Kg 89 / 101	Kg 144 / 160	Kg 205 / 220
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50 Standard Hz 60 Optional	Hz 50
Refrigerante / Refrigerant	R600A	R290	R290
Assorbimento / Absorption	W 130	W 680	W 300
Consumo Energia / Energy Consumption	KwH/24H 3,8	KwH/24H 12,6	KwH/24H 5,2