ARMADI MURALI CONGELATORI
MULTIDECK FREEZER

-22 | -18

Smart Link Wifi



ROMA 68 BT GRY
ROMA 68 BT BLK

Armadio freezer murale ventilato.
Bassa temperatura.
Ventilated multideck cooler.
Negative temperature

Colori disponibili / Available colors

A G C

SPECIFICHE COLORI / COLOR DETAILS

Versioni BLK / BLK Versions
Esterno / Exterior Nero / Black RAL9004

Versioni GRY / GRY Versions
Esterno / Exterior RAL7024



ROMA 137 BT BLK
ROMA 137 BT GRY

Armadio freezer murale ventilato.
Bassa temperatura.
Ventilated two doors multideck cooler.
Negative temperature

Colori disponibili / Available colors

A G D



Superficie esterna in lamiera opaca
Matte prepainted sheet



Porta vetro senza cornice
Full glass frameless door





Mensole con portaprezzo
Shelves with price holder


SUPER&MINIMARKET>

Caratteristiche principali / Main Features



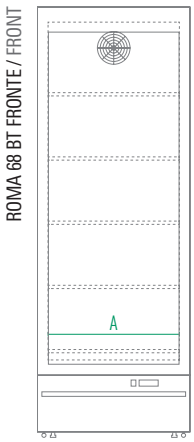

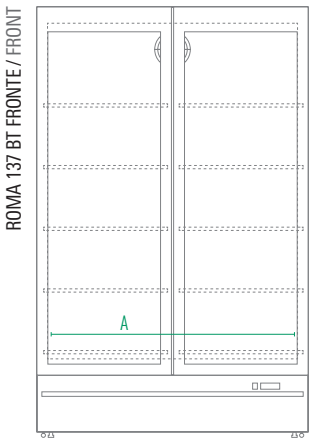

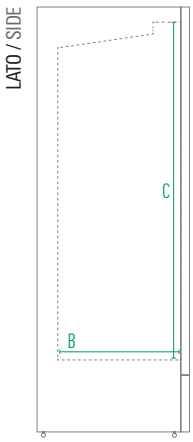

Dimensioni mm / Dimensions mm	ROMA 68 BT BLK	ROMA 137 BT BLK
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	680 x 745 x 1967	1370 x 745 x 1967
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	735 x 765 x 2100	1425 x 763 x 2100
A - Larghezza / Width	560	1250
B - Profondità / Depth	555	555
C - Altezza / Height	1515	1515

Caratteristiche Tecniche / Technical Features	ROMA 68 BT BLK	ROMA 137 BT BLK
Temperatura / Temperature Range	-22 °C / -18 °C	-22 °C / -18 °C
Classe Climatica / Climate Class	7	7
Volume Netto-Lordo / Net-Gross Volume	Lt. 288 / 415	Lt. 655 / 910
Superficie Esterna Body	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment
Porta Door	Porta vetro senza cornice Full glass frameless door	Porta vetro senza cornice Full glass frameless door
Superficie Interna Inner Liner	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 65	dB 65
Smart Link WiFi | Controllo remoto / Remote control	Optional	Optional
Spessore isolamento / Insulation thickness	mm 60	mm 60
Sbrinamento Defrost	Automatico a gas caldo Automatic hot gas	Automatico a gas caldo Automatic hot gas
Illuminazione / Lighting	2 Led verticali / Vertical	3 Led verticali / Vertical (BLK) 4 Led verticali / Vertical (GRY)
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes
Mensole con portaprezzo (LxP) / Shelves with price holder (WxD)	N° 4 + 1 - mm 540 x 445	N° 8 + 2 - mm 614 x 445
Ruote-Piedi / Castors-Feet	4 Ruote h 25 mm + 2 Piedi regolabili 4 Castors h 25 mm + 2 Adjustable Feet	6 Ruote h 25 mm + 3 Piedi regolabili 6 Castors h 25 mm + 3 Adjustable Feet
Peso Netto-Lordo / Net Weight	Kg 112 / 135	Kg 212,4 / 230
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 610	W 1130
Consumo Energia / Energy Consumption	KwH/24H 8,09	KwH/24H 15,57