

CONGELATORI A POZZO

CHEST FREEZER



Compressore INVERTER.
INVERTER compressor.



GELO 350 PS

Congelatore statico a pozzo porta cieca battente.
Static chest freezer with solid hinged lids.



GELO 450 PS

Congelatore statico a pozzo porta cieca battente.
Static chest freezer with solid hinged lids.



GELO 550 PS

Congelatore statico a pozzo porta cieca battente.
Static chest freezer with solid hinged lids.



GELO 650 PS

Congelatore statico a pozzo porta cieca battente.
Static chest freezer with solid hinged lids.




Chiave e serratura
Lock and key



Interno lamiera preverniciata bianca
White pre-painted sheet innerliner



Termostato e termometro meccanico
Mechanical thermostat and thermometer

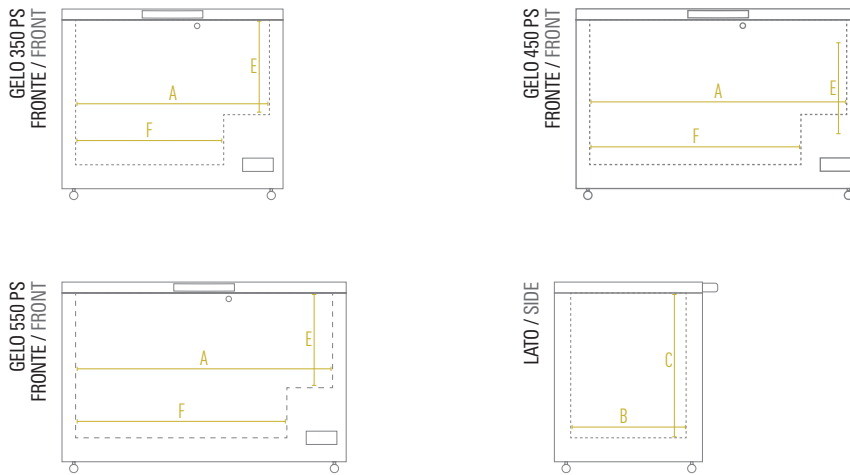

Dimensioni mm / Dimensions mm	GELO 350 PS	GELO 450 PS	GELO 550 PS	GELO 650 PS
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1035 x 750 x 880	1275 x 750 x 880	1535 x 750 x 880	1805 x 750 x 880
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1080 x 760 x 980	1320 x 760 x 980	1580 x 760 x 980	1850 x 760 x 980
A - Larghezza / Width	890	1130	1390	1660
B - Profondità / Depth	530	530	530	530
C - Altezza / Height	665	665	665	665
E - Altezza Minima / Min. Height	415	415	415	415
F - Larghezza Minima / Min. Width	660	900	1160	1430
Adesivo Laterale Destro / Side Right Sticker	670 x 530	670 x 530	670 x 530	670 x 530
Adesivo Laterale Sinistro / Side Left Sticker	670 x 762	670 x 762	670 x 762	670 x 762
Adesivo Frontale / Front Sticker	1030 x 762	1270 x 762	1530 x 762	1800 x 762

Caratteristiche Tecniche / Technical Features	GELO 350 PS	GELO 450 PS	GELO 550 PS	GELO 650 PS
Temperatura / Temperature Range	-23 °C / -10 °C	-23 °C / -10 °C	-23 °C / -10 °C	-23 °C / -10 °C
Classe Climatica / Climate Class	4	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 283 / 304	Lt. 368 / 383	Lt. 459 / 473	Lt. 560 / 567
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment			
Superficie Interna / Inner Liner	Lamiera preverniciata bianca con trattamento anticorrosione, con rivestimento in poliestere verniciato bianco White prepainted sheet with anticorrosion treatment, coating with white paint Polyester			
Cestelli / Baskets	Standard 1 pz / 1 pcs 573 x 245 x 248 mm	Standard 2 pz / 2 pcs 573 x 245 x 248 mm	Standard 2 pz / 2 pcs 573 x 245 x 248 mm	Standard 2 pz / 2 pcs 573 x 245 x 248 mm
Termometro / Thermometer	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical	Meccanico / Mechanical
Rumorosità / Noise level	dB 48	dB 50	dB 50	dB 50
Compressore / Compressor	Inverter	Inverter	Inverter	Inverter
Spessore isolamento / Insulation thickness	mm 70	mm 70	mm 70	mm 70
Sbrinatorio / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual	Manuale / Manual
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes	Si / Yes
Illuminazione led / Led lighting	Si / Yes	Si / Yes	Si / Yes	Si / Yes
Ruote-Piedi / Castors-Feet	4 Ruote h 70mm, 2 con freni 4 Castors h 70mm, 2 with brake	4 Ruote h 70mm, 2 con freni 4 Castors h 70mm, 2 with brake	4 Ruote h 70mm, 2 con freni 4 Castors h 70mm, 2 with brake	4 Ruote h 70mm, 2 con freni 4 Castors h 70mm, 2 with brake
Peso Netto-Lordo / Net-Gross Weight	Kg 43 / 57	Kg 52 / 65	Kg 63 / 82	Kg 68 / 91
Voltaggio / Voltage	V 220	V 220	V 220	V 220
Frequenza / Frequency	Hz 50	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A	R600A	R600A
Assorbimento / Absorption	W 90	W 125	W 125	W 125
Consumo Energia / Energy Consumption	KwH/24H 2,27	KwH/24H 2,603	KwH/24H 3,005	KwH/24H 3,450