

FRIGO VETRINE VERTICALI

VISICOOLER



ICOOL 401 C BLACK

Frigo vetrina bibite statica con agitatore
Static-fan assisted visicooler


Capienza / Capacity

	ICOOL 401 C BLACK
Bottiglia lt. 1 / Bottle lt. 1	88
Bottiglia cl. 75 / Bottle cl. 75	114
Bottiglia cl. 66 / Bottle cl. 66	126
Bottiglia cl. 50 / Bottle cl. 50	203
Bottiglia cl. 33 / Bottle cl. 33	240
Lattina cl. 33 / Can cl. 33	413

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging




Termometro digitale
Digital thermometer

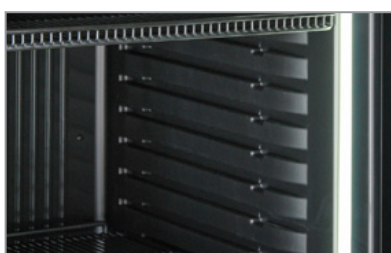

Interno in ABS termoformato
Thermoformed ABS inner liner



Porta vetro senza cornice
Full glass frameless door

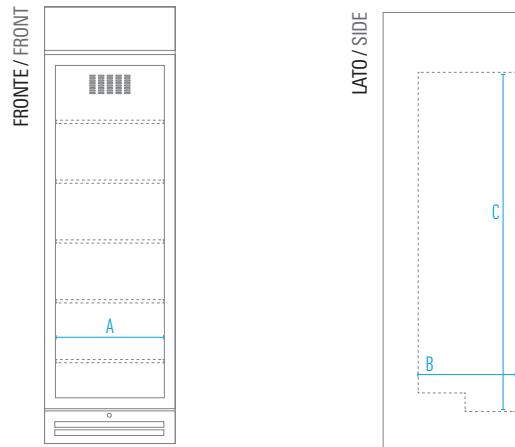

Dimensioni mm / Dimensions mm	ICOOOL 401 C BLACK
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	600 x 648 x 2005
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	650 x 685 x 2208
A - Larghezza / Width	491
B - Profondità / Depth	487
C - Altezza / Height	1556
Adesivo Laterale / Side Sticker	572 x 1956
Adesivo Vetro / Glass Sticker	485 x 1510
Adesivo Opalina / Canopy Sticker	592 x 192

Caratteristiche Tecniche / Technical Features	ICOOOL 401 C BLACK
Temperatura / Temperature Range	+0 °C / +10 °C
Classe Climatica / Climate Class	ST
Volume Lordo / Gross Volume	Lt. 360
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	ABS
Regolatore temperatura / Controller	Meccanico / Mechanical
Termometro / Thermometer	Digitale / Digital
Rumorosità / Noise level	dB 60
Spessore isolamento / Insulation thickness	40 mm
Sbrinamento / Defrost	Manuale / Manual
Illuminazione / Lighting	2 Led verticali x 7W / 2 vertical led x 7W
Chiusura automatica porta / Self closing door	Si / Yes
Chiave e serratura / Lock and key	Si / Yes
Reversibilità porta / Reversible door	No
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 510 x 414
Ruote-Piedi / Castors-Feet	2 Piedi + 4 Ruote 2 Feet + 4 Castors
Peso Netto-Lordo / Net-Gross Weight	Kg 83 / 95
Voltaggio / Voltage	V 220-240
Frequenza / Frequency	Hz 50
Refrigerante / Refrigerant	R 600 A
Assorbimento / Absorption	W 250
Consumo Energia / Energy Consumption	KwH/24H 2,1