

FRIGO VETRINE VERTICALI VISICOOLER



CL 1100 2G SL BLACK

Frigo bibite doppia porta scorrevole ventilato
Ventilated sliding double door visicooler



CL 1300 2G SL BLACK

Frigo bibite doppia porta scorrevole ventilato
Ventilated sliding double door visicooler



Capienza / Capacity	CL 1100 2G SL	CL 1300 2G SL
Bottiglia lt. 1 / Bottle lt. 1	264	308
Bottiglia cl. 75 / Bottle cl. 75	288	336
Bottiglia cl. 66 / Bottle cl. 66	336	440
Bottiglia cl. 50 / Bottle cl. 50	550	710
Bottiglia cl. 33 / Bottle cl. 33	710	890
Lattina cl. 33 / Can cl. 33	1100	1420

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging






Superficie esterna in lamiera nera opaca
Matte black prepainted sheet



Luci led
Led lighting



Termostato digitale
Digital thermostat

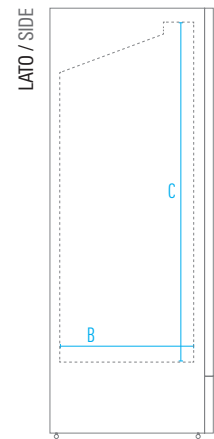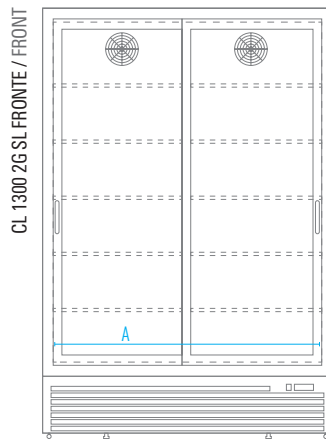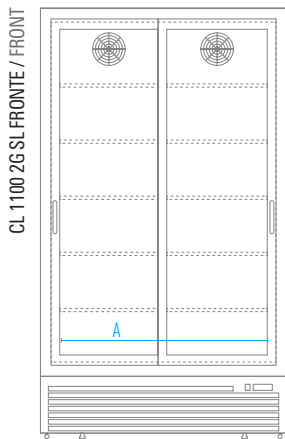

Dimensioni mm / Dimensions mm	CL 1100 2G SL	CL 1300 2G SL
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1130 x 750 x 1976	1330 x 750 x 1976
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1180 x 820 x 2100	1380 x 820 x 2100
A - Larghezza / Width	1033	1233
B - Profondità / Depth	615	617
C - Altezza / Height	1561	1561
Adesivo Laterale / Side Sticker	738 x 1930	738 x 1930
Adesivo Vetro / Glass Sticker	438 x 1473	548 x 1473

Caratteristiche Tecniche / Technical Features	CL 1100 2G SL	CL 1300 2G SL
Temperatura / Temperature Range	+0 °C / +10 °C	+0 °C / +10 °C
Classe Climatica / Climate Class	7	7
Volume Netto-Lordo / Net-Gross Volume	Lt. 738 / 1078	Lt. 886 / 1286
Superficie Esterna Body	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment	Lamiera nera opaca preverniciata con trattamento anticorrosione Matte black prepainted sheet with anticorrosion treatment
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi - Controllo remoto / Remote control	Optional	Optional
Rumorosità / Noise level	dB 65	dB 65
Spessore isolamento / Insulation thickness	mm 48,5	mm 48,5
Sbrinamento Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	2 Led verticali / Vertical	2 Led verticali / Vertical
Chiusura automatica porta / Self closing door	Scorrevole / Sliding	Scorrevole / Sliding
Chiave e serratura / Lock and key	No	No
Mensole (LxP) / Shelves (WxD)	N° 10 - mm 505 x 555	N° 10 - mm 605 x 555
Ruote-Piedi / Castors-Feet	4 Ruote + 2 Piedi / 4 Castors + 2 Feet	6 Ruote + 3 Piedi / 6 Castors + 3 Feet
Peso Netto-Lordo / Net-Gross Weight	Kg 148 / 176	Kg 161 / 189
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 630	W 630
Consumo Energia / Energy Consumption	KwH/24H 4,02	KwH/24H 3,71