FRIGO VINI RIVESTITI IN LEGNO
COATED WINE COOLER

+3 +16

A D G

Smart Link Wifi



CLWS 420 L NOCE

Frigo vini statico con ventola on/off, rivestito in frassino tinto noce medio.
Static wine cooler with on/off fan, coated with walnut ash.



CLWS 420 L WHITE

Frigo vini statico con ventola on/off, rivestito in frassino tinto nero.
Static wine cooler with on/off fan, coated with black ash.

Colorazioni standard – Standard colors



Noce - Frassino tinto noce.
Walnut - Walnut ash.



White - Frassino bianco.
White - White ash.



Natural - Frassino naturale.
Natural - Natural ash.



Black - Frassino nero.
Black - Black ash.

Capienza / Capacity	CLWS 420 L
Bottiglia cl. 75 / Bottle cl. 75	114

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging



Rivestimento in legno massello
Solid wood coating



Interno in ABS termoformato
Thermoformed ABS inner liner



Termostato elettronico
Electronic thermostat

WINE>

Caratteristiche principali / Main Features

CLWS 420 L FRONTE / FRONT



CLWS 420 L LATO / SIDE

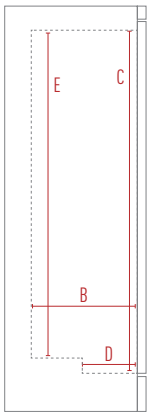

TEMPERATURA VENTOLA OFF / FAN OFF TEMPERATURE

TEMPERATURA VENTOLA ON / FAN ON TEMPERATURE

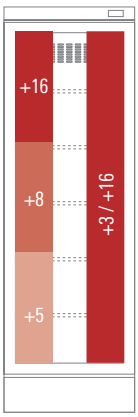

Dimensioni mm / Dimensions mm	CLWS 420 L
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	655 x 645 x 1880
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	710 x 710 x 2030
A - Larghezza / Width	519
B - Profondità / Depth	487
C - Altezza / Height	1557
D - Profondità Min. / Min. Depth	180
E - Altezza Min. / Min. Height	1337
Adesivo Vetro / Glass Sticker	496 x 1500

Caratteristiche Tecniche / Technical Features	CLWS 420 L
Temperatura / Temperature Range	+5 °C /+8 °C /+16°C ventola off/fan off +3 °C / +16 °C ventola on/fan on
Classe Climatica / Climate Class	ST
Volume Netto-Lordo / Net-Gross Volume	Lt. 274 / 360
Rivestimento / Coating	Legno massello di Frassino / Solid ash wood
Superficie Interna / Inner Liner	ABS
Termostato / Thermostat	Elettronico / Electronic
Smart Link WiFi | Controllo remoto / Remote control	dB 60
Rumorosità / Noise level	Optional
Spessore isolamento / Insulation thickness	mm 43
Sbrinamento / Defrost	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	2 Led 12 W verticali / 2 Vertical led 12W
Chiusura automatica porta / Self closing door	Si / Yes
Chiave e serratura / Lock and key	Si / Yes
Reversibilità porta (*solo su richiesta al momento dell'ordine) / Reversible door (*available only at order)	Si* / Yes*
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 516,5 x 414
Ruote-Piedi Castors-Feet	2 Ruote + 4 Piedi 2 Castors + 4 Feet
Peso Netto-Lordo / Net-Gross Weight	Kg 117 / 123
Voltaggio / Voltage	V 220-240
Frequenza / Frequency	Hz 50
Refrigerante / Refrigerant	R290
Assorbimento / Absorption	W 255
Consumo Energia / Energy Consumption	KwH/24H 1,52