

ARMADI REFRIGERATI

REFRIGERATED CABINETS



Mensole refrigerate
(versioni BT), distanza tra
mensole 21 cm.
Refrigerated shelves (BT
models), distance between
shelves 21 cm.



GN 400 PS TN

Armadio frigo statico con agitatore.
Temperatura positiva.
Static-fan assisted cabinet.
Positive temperature.



GN 600 PS TN

Armadio frigo statico con agitatore.
Temperatura positiva.
Static-fan assisted cabinet.
Positive temperature.



GN 400 PS BT

Armadio freezer statico.
Bassa temperatura.
Static freezer.
Negative temperature.



GN 600 PS BT

Armadio freezer statico.
Bassa temperatura.
Static freezer.
Negative temperature.





Ventola assiale (versione TN)
Axial fan (TN model)



Mensole rinforzate (versione TN)
Reinforced shelves (TN model)



Maniglia integrata
Built-in handle

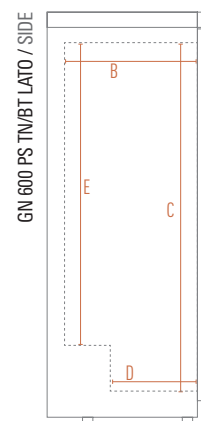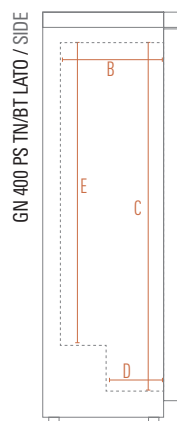

Dimensioni mm / Dimensions mm	GN 400 PS TN	GN 400 PS BT	GN 600 PS TN	GN 600 PS BT
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	600 x 625 x 1860	600 x 625 x 1860	775 x 760 x 1860	775 x 760 x 1860
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	660 x 725 x 2000	660 x 725 x 2000	850 x 790 x 2000	850 x 790 x 2000
A - Larghezza / Width	457	457	632	632
B - Profondità / Depth	474	474	610	610
C - Altezza / Height	1600	1600	1600	1600
D - Profondità Min. / Min. Depth	264	264	400	400
E - Altezza Min. / Min. Height	1390	1390	1390	1390

Caratteristiche Tecniche / Technical Features	GN 400 PS TN	GN 400 PS BT	GN 600 PS TN	GN 600 PS BT
Temperatura / Temperature Range	0 °C / +10 °C	-22 °C / -15 °C	0 °C / +10 °C	-22 °C / -15 °C
Classe Climatica / Climate Class	4	4	4	4
Capacità / Capacity	Lt. 400	Lt. 400	Lt. 600	Lt. 600
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	ABS	ABS	ABS	ABS
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 43,5	dB 38,7	dB 45,9	dB 38,4
Smart Link WiFi Controllo remoto / Remote controller	Optional	Optional	Optional	Optional
Spessore isolamento / Insulation thickness	mm 70	mm 70	mm 70	mm 70
Sbrinamento / Defrost	Automatico / Automatic	Manuale / Manual	Automatico / Automatic	Manuale / Manual
Illuminazione / Lighting	1 Led orizzontale 1 horizontal led	1 Led orizzontale 1 horizontal led	1 Led orizzontale 1 horizontal led	1 Led orizzontale 1 horizontal led
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes	Si / Yes	Si / Yes
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes	Si / Yes
Reversibilità porta / Reversible door	Si / Yes	Si / Yes	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 476 x 436 + N° 1 - mm 477 x 207	N° 6 - mm 476 x 436	N° 5 - mm 652 x 573 + N° 1 - mm 652 x 347	N° 6 - mm 652 x 573
Ruote-Piedi / Castors-Feet	2 Piedi + 2 Ruote / 2 Feet + 2 Castors	2 Piedi + 2 Ruote / 2 Feet + 2 Castors	2 Piedi + 2 Ruote / 2 Feet + 2 Castors	2 Piedi + 2 Ruote / 2 Feet + 2 Castors
Porta / Door	ABS	ABS	ABS	ABS
Peso Netto-Lordo / Net-Gross Weight	Kg 72 / 85	Kg 65 / 78	Kg 94 / 110	Kg 84 / 99
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R290	R600A	R290
Assorbimento / Absorption	W 176	W 200	W 194	W 260
Consumo Energia / Energy Consumption	KwH/24H 1,374	KwH/24H 2,933	KwH/24H 1,709	KwH/24H 3,695