

FRIGO VETRINE VERTICALI VISICOOLER



ICOOOL 401 BLK/WHT

Frigo vetrina bibite statica con agitatore
Static-fan assisted visicooler



Colori disponibili / Available colors



ICOOOL 401 G SZ BLK/WHT

Frigo vetrina bibite statica con agitatore
Static-fan assisted visicooler




Colori disponibili / Available colors



Capienza / Capacity	ICOOOL 401 BLK / WHT	ICOOOL 401 G SZ BLK/WHT
Bottiglia lt. 1 / Bottle lt. 1	86	86
Bottiglia cl. 75 / Bottle cl. 75	126	126
Bottiglia cl. 66 / Bottle cl. 66	150	150
Bottiglia cl. 50 / Bottle cl. 50	210	210
Bottiglia cl. 33 / Bottle cl. 33	210	210
Lattina cl. 33 / Can cl. 33	560	560

Dati indicativi e variabili a seconda dei diversi packaging / Variable data depending on the different packaging

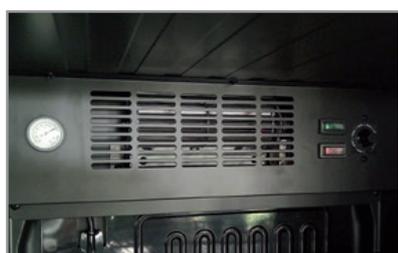





Regolatore di temperatura meccanico (ICOOOL 401)
Mechanical controller (ICOOOL 401)



Interno in ABS termoformato
Thermoformed ABS inner liner



Porta a sfioro senza cornice
Full glass frameless door

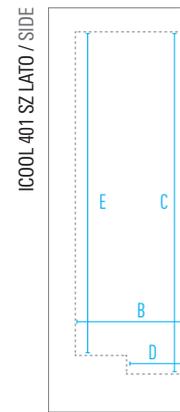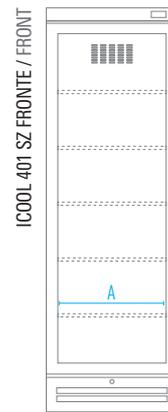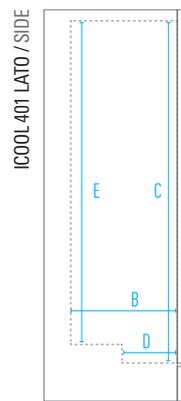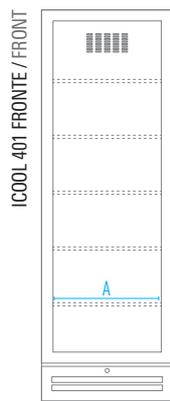

Dimensioni mm / Dimensions mm	IC00L 401 BLK/WHT	IC00L 401 G SZ BLK/WHT
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	600 x 649 x 1801	600 x 651 x 1861
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	650 x 685 x 2005	650 x 685 x 2058
A - Larghezza / Width	491	491
B - Profondità / Depth	487	487
C - Altezza / Height	1556	1556
Adesivo Laterale / Side Sticker	569 x 1750	569 x 1810
Adesivo Vetro / Glass Sticker	482 x 1507	482 x 1507

Caratteristiche Tecniche / Technical Features	IC00L 401 BLK/WHT	IC00L 401 G SZ BLK/WHT
Temperatura / Temperature Range	0 °C / +10 °C	-2 °C / +6 °C
Classe Climatica / Climate Class	4	4
Volume Lordo / Gross Volume	Lt. 360	Lt. 360
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	ABS	ABS
Termostato / Thermostat	Meccanico / Mechanical	Elettronico / Electronic
Termometro / Thermometer	Si / Yes	-
Smart Link WiFi Controllo remoto / Remote control	-	Optional
Rumorosità / Noise level	dB 60	dB 60
Spessore isolamento / Insulation thickness	mm 40	mm 40
Sbrinamento / Defrost	Manuale / Manual	Automatico con resistenza elettrica Automatic with electric heater
Illuminazione / Lighting	2 Led verticali (versione BLK) 1 Led verticale (versione WHT) 2 Vertical led (BLK version) 1 vertical led (WHT version)	2 Led verticali (versione BLK) 1 Led verticale (versione WHT) 2 Vertical led (BLK version) 1 vertical led (WHT version)
Chiusura automatica porta / Self closing door	Si / Yes	Si / Yes
Chiave e serratura / Lock and key	Si / Yes	Si / Yes
Mensole (LxP) / Shelves (WxD)	N° 5 - mm 510 x 414	N° 5 - mm 510 x 414
Ruote-Piedi / Castors-Feet	4 Ruote + 2 Piedi / 4 Castors + 2 Feet	4 Ruote + 2 Piedi / 4 Castors + 2 Feet
Peso Netto-Lordo / Net-Gross Weight	Kg 79 / 93	Kg 87 / 99
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A
Assorbimento / Absorption	W 230	W 250
Consumo Energia / Energy Consumption	KwH/24H 2,1	KwH/24H 2,7