FRIGO RETRO BANCO
BACK BAR COOLER

0 +10 C

Smart Link Wifi



BB 221 SD
Frigo retro banco bar ventilato
Ventilated back bar cooler



BB 322 SD
Frigo retro banco bar ventilato
Ventilated back bar cooler



BB 423 SD
Frigo retro banco bar ventilato
Ventilated back bar cooler



Cassettiera
Drawers




Maniglia integrata
Built-in handle





Termostato elettronico
Electronic thermostat


BEVERAGE>


Caratteristiche principali / Main Features

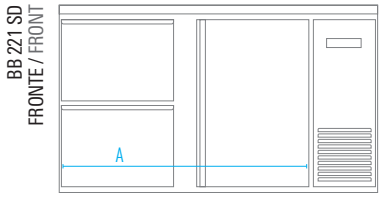





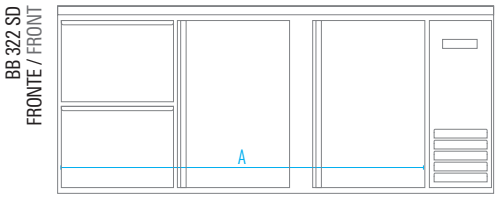

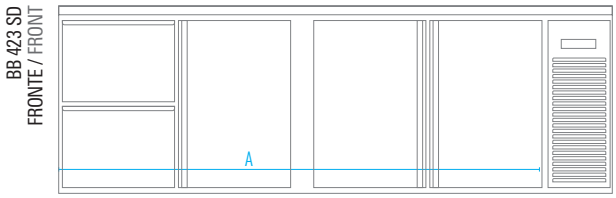

Dimensioni mm / Dimensions mm	BB 221 SD	BB 322 SD	BB 423 SD
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1462 x 513 x 860	2002 x 513 x 860	2542 x 513 x 860
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1522 x 575 x 1050	2062 x 575 x 1050	2605 x 575 x 1050
A - Larghezza / Width	1082	1622	2162
B - Profondità / Depth	415	415	415
C - Altezza / Height	720	720	720
Cassetti (L x P x H)	39,5 x 38,5 x 31,5	39,5 x 38,5 x 31,5	39,5 x 38,5 x 31,5

Caratteristiche Tecniche / Technical Features	BB 221 SD	BB 322 SD	BB 423 SD
Temperatura / Temperature Range	0 °C / +10 °C	0 °C / +10 °C	0 °C / +10 °C
Classe Climatica / Climate Class	4	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 201 / 350	Lt. 319 / 537	Lt. 448 / 698
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	Acciaio Inox Stainless Steel	Acciaio Inox Stainless Steel	Acciaio Inox Stainless Steel
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Smart Link WiFi | Controllo remoto / Remote control	Optional	Optional	Optional
Rumorosità / Noise level	dB 47	dB 47	dB 47
Spessore isolamento / Insulation thickness	mm 40	mm 40	mm 40
Sbrinamento Defrost	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle	Automatico a fermo compressore Automatic compressor cycle
Illuminazione / Lighting	2 Led Verticali / Vertical	2 Led Verticali / Vertical	2 Led Verticali / Vertical
Chiusura automatica porta / Self closing door	Chiusura ammortizzata Soft closing	Chiusura ammortizzata Soft closing	Chiusura ammortizzata Soft closing
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Reversibilità porta / Reversible door	No	No	No
Mensole (LxP) / Shelves (WxD)	N° 2 - mm 430 x 395	N° 4 - mm 430 x 395	N° 6 - mm 430 x 395
Ruote-Piedi / Castors-Feet	6 Piedi / 6 Feet - h mm 35/65	6 Piedi / 6 Feet - h mm 35/65	6 Piedi / 6 Feet - h mm 35/65
Peso Netto-Lordo / Net-Gross Weight	Kg 99 / 120	Kg 116 / 149	Kg 133 / 154
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A	R600A
Assorbimento / Absorption	W 320	W 320	W 320
Consumo Energia / Energy Consumption	KwH/24H 2,87	KwH/24H 3,42	KwH/24H 3,91