

POZZETTI FRIGO/FREEZER

DUAL CHEST COOLER/FREEZER



FRC 500 PFF

Frigo/Congelatore statico a pozzo vetro piatto scorrevole.
Static chest cooler/freezer with flat sliding glass lids.

A
G C



FRC 600 PFF

Frigo/Congelatore statico a pozzo vetro piatto scorrevole.
Static chest cooler/freezer with flat sliding glass lids.

A
G C






Ruote
Castors



Cestelli
Baskets



Termometro analogico
Analogue thermometer

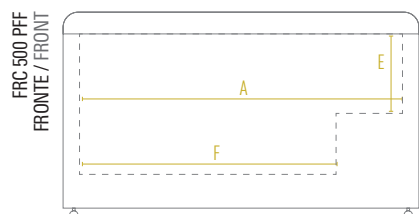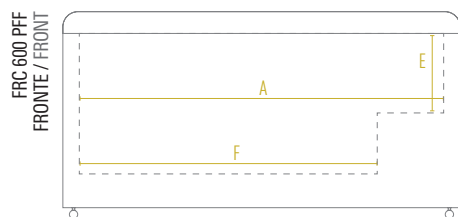

Dimensioni mm / Dimensions mm	FRC 500 PFF	FRC 600 PFF
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1634 x 653 x 900	1824 x 653 x 900
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1680 x 720 x 980	1860 x 720 x 980
A - Larghezza / Width	1483	1673
B - Profondità / Depth	505	505
C - Altezza / Height	645	645
E - Altezza Minima / Min. Height	365	365
F - Larghezza Minima / Min. Width	1178	1368
Adesivo Laterale Sinistro / Side Left Sticker	660 x 722	660 x 722
Adesivo Frontale / Front Sticker	1660 x 712	1850 x 712

Caratteristiche Tecniche / Technical Features	FRC 500 PFF	FRC 600 PFF
Temperatura / Temperature Range	0 °C / +10 °C -18 °C / 0 °C	0 °C / +10 °C -18 °C / 0 °C
Classe Climatica / Climate Class	4	4
Volume Netto-Lordo / Net-Gross Volume	Lt. 439 / 516	Lt. 501 / 586
Superficie Esterna Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna Inner Liner	Alluminio preverniciato Precoated aluminium	Alluminio preverniciato Precoated aluminium
Cestelli Baskets	560 x 280 x 208 mm Standard 3pz / 3pcs Optional (max 7pz / max 7pcs)	560 x 280 x 208 mm Standard 3pz / 3pcs Optional (max 8pz / max 8pcs)
Termometro / Thermometer	Analogico / Analogue	Analogico / Analogue
Regolatore temperatura / Controller	Meccanico / Mechanical	Meccanico / Mechanical
Rumorosità / Noise level	dB 57	dB 57
Spessore isolamento / Insulation thickness	mm 70	mm 70
Sbrinamento / Defrost	Manuale / Manual	Manuale / Manual
Illuminazione / Lighting	Led 5,5 W	Led 5 W
Chiave e serratura / Lock and key	Si / Yes	Si / Yes
Ruote-Piedi / Castors-Feet	4 Ruote (2 con freni) 4 Castors (2 with brakes)	4 Ruote (2 con freni) 4 Castors (2 with brakes)
Peso Netto-Lordo / Net-Gross Weight	Kg 64 / 82	Kg 72 / 90
Voltaggio / Voltage	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50
Refrigerante / Refrigerant	R290	R290
Assorbimento / Absorption	W 280	W 320
Consumo Energia / Energy Consumption	KwH/24H 4,064	KwH/24H 4,007