


VRX 2000 380 FG

Sovrastruttura refrigerata
Acciaio AISI 201

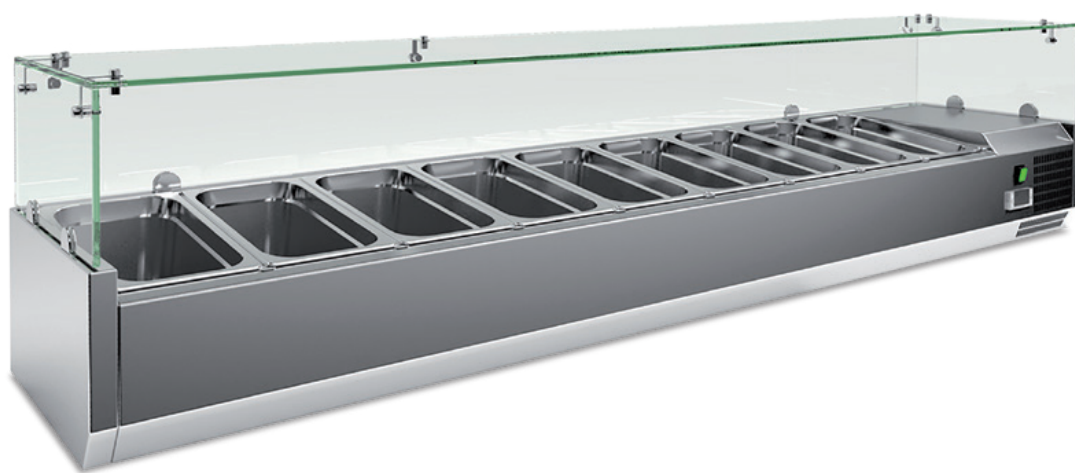

INFORMAZIONI TECNICHE / TECHNICAL INFORMATION	
Modello / Model	VRX 2000 380 FG
Temperatura / Temperature range	+2 °C / +8 °C
Dimensioni esterne (LxDxH)	2000 x 395 x 435 mm
External dimensions (WxDxH)	
Dimensioni imballo (LxDxH)	2060 x 470 x 440 mm
Packaging dimensions (WxDxH)	
Dimensioni Interne (LxDxH)	1650 x 311 x 165 mm
Inner dimensions (WxDxH)	
Volume lordo / Gross volume	83 lt
Peso netto / Peso lordo	56/81 kg
Net weight / Gross weight	
Superficie Esterna / Body	Acciaio AISI 201 / AISI 201 Stainless steel
Superficie interna / Inner liner	Acciaio AISI 201 / AISI 201 Stainless steel
Vaschette Gastronorm - Non incluse	9 x GN 1/3
GN pans - Not included	
Ruote e piedini / Rollers and feet	4 Piedi / 4 feet
Refrigerante / Refrigerant	R600A
Spessore isolamento / Insulation thickness	45 mm
Frequenza / Voltaggio Frequency / Voltage	50Hz / 220 V
Classe climatica / Climate class	4
Assorbimento / Absorption	200 W
Consumo Energia / Energy Consumption	KwH/24H 1,6