


# POZZETTI PORTA SOLIDA

## COOLER WITH SOLID HINGED LIDS



### CLP 300 PS

Pozzetto statico con porta cieca battente.  
Static cooler with solid hinged lids.



### CLP 400 PS

Pozzetto statico con porta cieca battente.  
Static cooler with solid hinged lids.



### CLP 400 PSSL


Pozzetto statico con porta cieca scorrevole.  
Static cooler with solid sliding lids.








Termostato elettronico  
Electronic thermostat



Interno in lamiera preverniciata bianca  
White pre-painted sheet inner liner

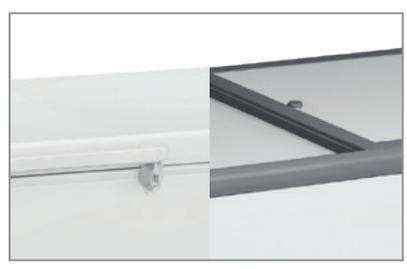

Chiave e serratura  
Lock and key



Dimensioni mm / Dimensions mm	CLP 300 PS	CLP 400 PS	CLP 400 PSSL
Dimensioni Esterne (LxPxH) / External Dimensions (WxDxH)	1090 x 690 x 860	1320 x 690 x 860	1280 x 670 x 820
Dimensioni Imballo (LxPxH) / Packaging Dimensions (WxDxH)	1140 x 710 x 943	1370 x 710 x 943	1340 x 730 x 910
A - Larghezza / Width	962	1192	1140
B - Profondità / Depth	472	472	527
C - Altezza / Height	680	680	670
E - Altezza Minima / Min. Height	430	430	410
F - Larghezza Minima / Min. Width	662	892	840
Adesivo Frontale / Front Sticker	1080 x 740	1310 x 740	1270 x 750
Adesivo Laterale Destro / Side Right Sticker	590 x 740	590 x 740	630 x 750
Adesivo Laterale Sinistro / Side Left Sticker	590 x 470	590 x 470	630 x 490

Caratteristiche Tecniche / Technical Features	CLP 300 PS	CLP 400 PS	CLP 400 PSSL
Temperatura / Temperature Range	+2 °C / +8 °C	+2 °C / +8 °C	+2 °C / +8 °C
Classe Climatica / Climate Class	C1	C1	C1
Volume Netto-Lordo / Net-Gross Volume	Lt. 275 / 278	Lt. 349 / 352	Lt. 327 / 387
Superficie Esterna / Body	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment	Lamiera preverniciata con trattamento anticorrosione Prepainted sheet with anticorrosion treatment
Superficie Interna / Inner Liner	Lamiera preverniciata bianca White prepainted sheet	Lamiera preverniciata bianca White prepainted sheet	Lamiera preverniciata bianca White prepainted sheet
Termostato / Thermostat	Elettronico / Electronic	Elettronico / Electronic	Elettronico / Electronic
Rumorosità / Noise level	dB 44	dB 44	dB 44
Spessore isolamento / Insulation thickness	mm 65	mm 65	mm 70
Sbrinatorio / Defrost	Manuale / Manual	Manuale / Manual	Manuale / Manual
Chiave e serratura / Lock and key	Si / Yes	Si / Yes	Si / Yes
Ruote-Piedi / Castors-Feet	4 Ruote (2 con freni) 4 Castors (2 with brakes)	4 Ruote (2 con freni) 4 Castors (2 with brakes)	4 Ruote (2 con freni) 4 Castors (2 with brakes)
Peso Netto-Lordo / Net-Gross Weight	Kg 44 / 47	Kg 48 / 51	Kg 57 / 63
Voltaggio / Voltage	V 220-240	V 220-240	V 220-240
Frequenza / Frequency	Hz 50	Hz 50	Hz 50
Refrigerante / Refrigerant	R600A	R600A	R600A
Assorbimento / Absorption	W 165	W 250	W 220
Consumo Energia / Energy Consumption	KwH/24H 0,581	KwH/24H 0,559	KwH/24H 1,37